



Room Air 2000

XC/YC Series Air Conditioners (cool only) 10,200-26,500 Btu/Hr

Carrier's XC/YC Series includes 14 high-efficiency, energy-saving air conditioning units. They provide quiet cooling for living areas, offices and shops from 400 to 1,800 square feet. Easy installation through-the-wall or through-the-window with expandable wing panels.



remote option available on some models

Standard Features

- Exhaust and ventilation controls (ventilation on Y series only)
- Quiet, reliable operation
- Slide-out chassis
- Easy-access filter
- Weather Armor™ cabinet provides three times the salt corrosion protection of ordinary enamel finishes
- Concealed control panel



Manual Control Features

- SureTemp™ automatic thermostat
- Energy Saver switch
- Six-way air flow control

Electronic Control Features

- User friendly electronic control
- Sleep or night setback setting
- Automatic fan speed control or three (3) manual settings in cooling and fan only positions
- Dehumidification setting
- Clock


- 24-hour timer with factory preset start and stop times or programmable to customer's desired times
- Turbo setting for maximum cooling
- True energy save mode
- Dirty filter indicator
- Built-in diagnostics
- Liquid crystal display
- Set temperature and room temperature digital readout
- Accurate electronic temperature control
- Auto air circulator

Model	Voltage	Cooling Capacity (Btu/Hr)	EER
XCE101D	115	10,200	10.0
XCD121D	115	12,000	10.0
XCB123D	230/208	12,000/11,600	10.2
XCA141D	115	13,800	10.1
XCB153D	230/208	15,000/14,700	10.2/10.2
XCB183D	230/208	18,000/17,700	9.6/9.6
YCE213D	230/208	20,500/20,100	8.4/8.4
YCB213D 	230/208	21,000/20,800	9.2/9.2
YCB243D	230/208	23,500/23,200	8.5/8.5
YCB273D	230/208	26,500/26,100	8.2/8.2
Electronic Control Options			
XCB121E	115	12,000	10.0
XCB183E	230/208	18,000/17,000	9.6/9.6
YCB213E 	230/208	21,000/20,800	9.2/9.2
YCB213R*	230/208	21,000/20,800	9.2/9.2


*Available with remote control




Window and Unit Dimensions:

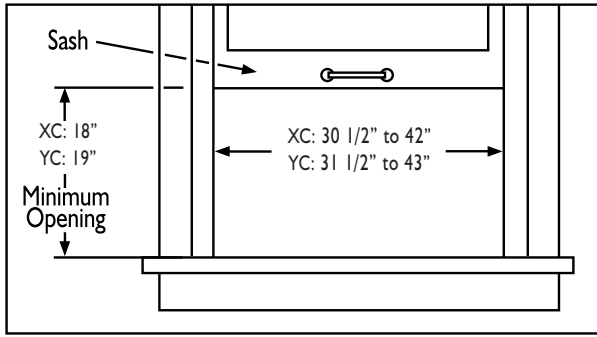

XC Series




YC Series




Product Specifications:

Model	Capacity, Btu/Hr	Volts	EER	Watts	Amperes	Receptacle Type	Fuse Size *	Fan Speeds	Moisture Removal, Pts./Hr.	CFM, Hi/Lo	Air Throw, Feet	Air Flow Control	Ventilation	Exhaust	Energy Saver Switch	Cabinet Dimensions				Chassis Type	Window Installation Kit	Weight (net/ship)	UPC Code Numbers
																A (height)	B (width)	C (depth)	D (depth without grille)				
COOL ONLY UNITS																							
XCE101D	10200	115	10.0	1020	10.0	1	15	3	2.7	290/170	34	6-WAY	NO	YES	YES	16 3/4	25 3/16	23 3/4	10 1/2	SLIDE-OUT	INCLUDED	110/119	781897102090
XCD121D	12000	115	10.9	1200	10.9	1	15	3	4.3	290/170	34	6-WAY	NO	YES	YES	16 3/4	25 3/16	23 3/4	10 1/2	SLIDE-OUT	INCLUDED	115/124	781897101628
XCB123D	12000	230	10.0	1190	5.3	3	15	3	4.3	290/170	34	6-WAY	NO	YES	YES	16 3/4	25 3/16	23 3/4	10 1/2	SLIDE-OUT	INCLUDED	115/124	781897101635
	11600	208	10.0	1150	5.6																		
XCA141D	13800	115	10.0	1370	12.0	1	15	3	3.4	400/290	47	6-WAY	NO	YES	YES	16 3/4	25 3/16	23 3/4	10 1/2	SLIDE-OUT	INCLUDED	117/128	781897100188
XCB153D	15000	230	10.2	1470	6.5	3	15	3	4.3	400/290	47	6-WAY	NO	YES	YES	16 3/4	25 3/4	27 9/16	11 1/2	SLIDE-OUT	INCLUDED	121/131	781897100799
	14700	208	10.2	1440	7.0																		
XCB183D	18000	230	9.6	1870	8.3	3	15	3	5.1	460/330	54	6-WAY	NO	YES	YES	16 3/4	25 3/16	23 3/4	10 1/2	SLIDE-OUT	INCLUDED	123/133	781897100812
	17700	208	9.6	1840	8.3																		
YCE213D	20500	230	8.4	2420	10.8	4	20	3	5.9	600/440	65	6-WAY	YES	YES	YES	17 9/16	26	27 9/16	11 1/2	SLIDE-OUT	INCLUDED	176/186	781897101420
	20100	208	8.4	2400	11.8																		
YCB213E	21000	230	9.2	2290	10.4	3	15	3	5.5	600/440	65	AUTO	YES	YES	YES	17 9/16	26	27 9/16	11 1/2	SLIDE-OUT	INCLUDED	143/153	781897100935
	20800	208	9.2	2260	11.3																		
YCB243D	23500	230	8.5	2760	12.4	4	20	3	7.0	600/440	65	6-WAY	YES	YES	YES	17 9/16	26	27 9/16	11 1/2	SLIDE-OUT	INCLUDED	159/169	781897100881
	23200	208	8.5	2730	13.4																		
YCB273D	26500	230	8.2	3210	14.0	4	20	3	8.5	600/440	65	6-WAY	YES	YES	YES	17 9/16	26	27 9/16	11 1/2	SLIDE-OUT	INCLUDED	159/169	781897101116
	26100	208	8.2	3190	15.5																		
YCE273D	26500	230	8.2	3210	14.0	4	20	3	8.5	600/440	65	6-WAY	YES	YES	YES	17 9/16	26	27 9/16	11 1/2	SLIDE-OUT	INCLUDED	159/169	781897102519
	26100	208	8.2	3190	15.5																		
XCB121E	12000	115	10.0	1200	10.5	1	15	3	4.0	290/170	34	AUTO	NO	YES	YES	16 3/4	25 19/16	23 3/4	10 1/2	SLIDE-OUT	INCLUDED	159/169	781897100904
XCB183E	18000	230	9.6	1870	8.3	3	15	3	5.1	460/330	54	AUTO	NO	YES	YES	16 3/4	25 19/16	23 3/4	10 1/2	SLIDE-OUT	INCLUDED	123/133	781897100867
	17700	208	9.6	1840	8.8																		
YCB213R	21000	230	9.2	2290	10.4	3	15	3	5.5	600/440	65	AUTO	YES	YES	YES	17 9/16	26	27 9/16	11 1/2	SLIDE-OUT	INCLUDED	143/153	781897100744
	20800	208	9.2	2260	11.3																		

*Fuse Time delay or equivalent.



Required Wall Receptacles



www.carrier.com

Due to Carrier's commitment to continuous improvement, specifications are subject to change without notice.

For a complete listing of Carrier Room Air Conditioners, visit us at www.carrier.com