

## Product Data and Specification

MODEL	PAC1011 12	PAC1211 12	PAC1811 12	PAC2412	PAC3612	PAC3632	PAC6012	PAC6032	PAC6034
<b>Cooling Capacity ①</b>	10,100	12,700	18,010	24,020	36,050	36,050	60,050	60,050	60,050
<b>Voltage</b>	115/60/1 or 208/230/1			208/230/1		208/230/3	208/230/1	208/230/3	460/3
<b>Cooling Amps ②</b>	9.0/4.5	12.0/7.0	15.5/7.8	12.3	22.5	14	34.0	25.0	12.4
<b>Cooling Watts ②</b>	1030	1256	1590	2200	3360	3360	5900	5900	5900
<b>In Rush Current (Amps)</b>	69.9	92.8	114.2	79	128.8	111.8	198.0	134.2	135.6
<b>Fuse/Breaker (Amps) ②</b>	15	15	20	20	30	20	50	40	30
<b>Plug Type</b>	5-15P	5-15P	5-20P	6-20P	6-30P	L15-20P	6-50P	L15-30P	L16-30P
<b>EER ③</b>	10.6	10.1	11.3	10.9	10.7	10.7	10.1	10.1	10.1
<b>Compressor HP</b>	3/4	1	1 1/2	2	3	3	5	5	5
<b>Compressor RLA</b>	7.4	9.3	11.4	8.3	17.9	11.4	28.0	20.0	8.2
<b>Compressor LRA</b>	42	58	65	49	88	77	169	123	59.6
<b>Evap CFM ④</b>	300	400	600	810	1310	1310	1950	1950	1950
<b>Evap Motor HP</b>	1/15	1/15	1/5	1/3	1/2	1/2	1	1	1
<b>Evap Motor Watts</b>	200	200	210	350	375	375	550	550	550
<b>Condenser CFM</b>	580	580	930	1010	1390	1390	2200	2200	2200
<b>Condenser Motor HP</b>	1/8	1/8	1/3	1/2	3/4	3/4	1	1	1
<b>Condenser Motor Watts</b>	280	280	450	330	460	460	750	750	750
<b>Condensate Pump Head (Pump Optional)</b>	20 Feet <b>Pump Optional on these units</b>						20 Feet <b>Pump Standard</b>		
<b>Sound Level ⑤</b>	53	54	60	65	69		78		
<b>R-22 Charge Oz.</b>	24	29	42	40	45		68		
<b>(A) Height with Casters</b>	31 1/2		37 1/2		47		52 1/4		
<b>(B) Width</b>	20 1/8		24 1/4		28 1/4				
<b>(C) Depth</b>	22 5/8		24 3/4		31		39		
<b>(D) Height Without Casters</b>	28 1/2		34 1/2		42 1/4		48 3/4		
<b>Net Weight</b>	150	150	200	210	280		460	460	520
<b>Shipping Weight</b>	170	170	230	240	310		500	500	560
<b>Shipping Volume</b>	15		21		29		43		
<b>(E) Condenser Air Discharge</b>	12 inch round		12 inch round				16 inch round		
<b>Optional Evap Nozzles</b>	2-4 inch X 15 inch long		2 - 6 in. x 23 in. long				2 - 8 in. x 20 long		
<b>Optional Evap Duct Adapter</b>	1 - 6 inch round		1 - 10 in. round				1 - 16 in. round		


### All units available in 220/50 cycle

- ① Cooling Capacity is total BTU/HR at 80°DB/67°WB high fan speed
- ② Time delay fuses/circuit breakers are recommended.
- ③ EER determined with condenser discharge air ducted into another area on high fan speed.
- ④ CFM with free discharge.
- ⑤ Sound pressure, dB at 5 feet, commercial configuration.
- ⑥ Amps & Watts at 208 Volts

Ambient Operating Range 65° to 105°

May operate to 55° if equipped with optional factory installed hot gas bypass

Specifications subject to change without notice

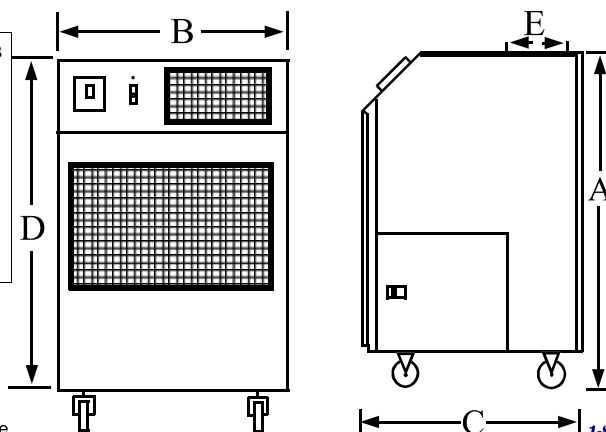

Optional nozzles length measured compressed.

Note: Condenser inlet air plenum adds 13 inches to dimension "C".

Electrical ratings per U.L. 484 at 95°F DB/75°WB on high fan speed



1-866-GET-AIRE (438-2473) airbosspecs1