

Zero Clearance Gas Fireplace
Model ZDV6000



Direct Vent Gas Fireplace




The ultimate in design, engineering & quality

This unit illustrated is a ZDV6000N Zero Clearance Direct Vent Natural Gas Fireplace, with LOGC5 Log Set – Four Piece - Cast Split Oak, Z6GBP Grill Kit – Classic Polish Brass, Z33SLPB Surround Slim Line – Polish Brass, and Z33RL Refractory Liner.

The Ultimate in Zero Clearance Direct Vent Fireplaces for New Home Construction or Renovation

Your best choice for installation anywhere throughout your home.

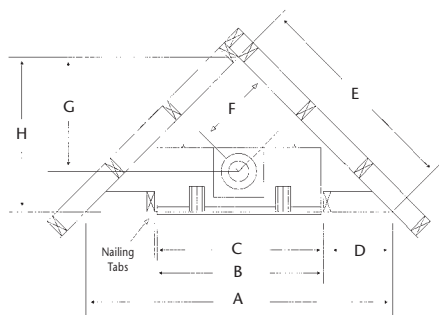

Corner Framing Dimensions (inches)
ZDV6000

A	60 ⁵ / ₈ "
B	33 ¹ / ₈ "
C	32 ¹ / ₂ "
D	13 ⁹ / ₁₆ "
E	42 ⁷ / ₈ "
F	14 ⁷ / ₈ "
G	21 ¹ / ₁₆ "
H	30 ³ / ₈ "

Unit and Framing Specifications (inches)

Top Flue Model	Height		Front Width		Depth	
	Actual	Framing	Actual	Framing	Actual	Framing
ZDV6000	30 ¹ / ₂ "	31"	32 ¹ / ₂ "	33 ¹ / ₈ "	14"	14"

Choice of Log Sets

LOGC5 Log Set shown on the front of brochure.



LOGFS Log set – Four Piece – Oak


Unit illustrated is a ZDV6000LP Zero Clearance Direct Vent Fireplace – Propane, with LOGFS Log Set, Z6GCR Grill Kit – Chrome, and Z33ADTH Arch Door Top Half.



LOGC5 Log Set – Four Piece – Oak

Unit illustrated is a ZDV6000N Zero Clearance Direct Vent Fireplace – Natural Gas, with LOGC5 Log Set, Z33PBL, Z33ADDX Arch Door Frame – Deluxe, and Z33PBL Decorative Black Panel Grill Kit.

Vertical flue option #1

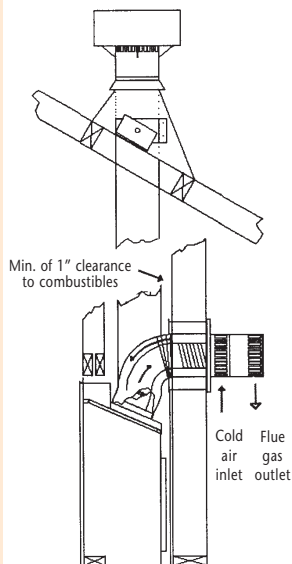

Horizontal flue option #2



Enjoy the elegance and warmth of glowing embers and dancing flames around your choice of log sets. It is sure to be the focal point of your home. Choose from a variety of decorative options to create your own distinctive appearance and be assured of complete safety, comfort and long lasting value from a manufacturer of wood and gas fireplaces with more than 25 years of experience.

Here is a fireplace that has fully sealed combustion chamber with no pollution spillage to depreciate the indoor air quality of your home.

Model	ZDV6000N	ZDV6000LP
Fuel	natural	liquid propane
Input	25,000 - 21,000 BTU	25,000 - 20,000 BTU
Output	17,750 - 14,910 BTU	18,500 - 14,800 BTU
Efficiency	71%	74%
FE (P4.1-02)	56.0%	56.0%

Features*

- Millivolt valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Dual burner with Realistic Flame Pattern
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- Bedroom and Bedsitting Room approved

Optional Features

Decorative Black Panels or Grills – Grills available in Black, Polish Brass, Antique Brass, Chrome and Classic Series Black with Polish Brass, Antique or Chrome Accents

Arch Doors – Black, Polish Brass, Antique Brass

Designer Black Arch Doors – Deluxe, Top Half, Double Arch and Double Door

Surrounds Wide - Polish Brass, Antique or Chrome

Coverage – 31³/₁₆" h x 36⁵/₈" w

Surrounds Slim Line - Polish Brass, Antique Brass,

Chrome or Gun Metal Black,

Coverage – 30⁷/₈" h x 33⁷/₈" w

Fan Kit – Heat activated with variable speed control

Brick Refractory Liner – Three piece

Wall Mount Thermostat – Programmable Millivolt Thermostat

Remote Control – on/off or thermostat

*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Industries maintains a program of continuous testing refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: The model ZDV6000 is certified for USA/Canada as a Gravity Direct Vent Wall Furnace. Certified to: ANSI Z21.44-1995, CGA IR#41, CAN/CGA-2.19 M81, IR#55, REV.1-1995, CAN/CGA-2.17-M91, ANSI Z21.50-1996/CGA 2.22-M96, CGA P4.1-1996, CSA P4.1-02.



Direct Vent Gas Fireplace



Kingsman Fireplaces

2340 Logan Avenue

Winnipeg, Manitoba, Canada R2R 2V3

Phone: (204) 632-1962 Fax: (204) 632-1960

www.kingsmanind.com