

TOTALINE® HUMIDIFIERS

TOTALINE® HUMIDIFIERS


MAKE YOURSELF COMFORTABLE WITH TOTALINE

It's easy. Just choose the Totaline quality humidifier that fits your needs.

All Totaline humidifiers are designed for exceptionally quiet operation. The humidifiers are easy to install with heat pumps as well as upflow, downflow, or horizontal furnaces. And they use water far more efficiently than many major brands.

TOTALINE® STAR STAINLESS STEEL HUMIDIFIER

Designed for long life, easy installation and low maintenance, choose the Totaline® P110-100 Star Stainless Steel Humidifier. The top and bottom of the Star Stainless Steel Humidifier are identical, and with snap-on motor assembly and bypass tube collar, no time is wasted.

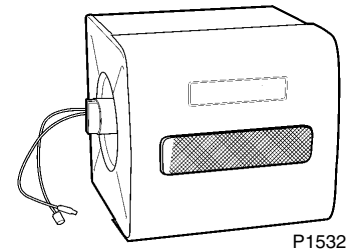

FEATURES:

- Outputs 19 GPD.
- Stainless steel construction with viewing window.
- Complete package includes all installation components, transformer, humidistat, bypass tube, water supply valve and tube, low voltage wire, collar and damper.
- Patented float and evaporator pad ensures maximum efficiency and years of worry-free operation.
- "Flip-flow" cabinet for left or right bypass installations.
- One-piece collapsible drum, for easy assembly and maintenance.
- The seamless Polyurethane pad is so good it's patented. This one-piece pad ensures steady, even drum rotation and will never separate.
- Patented polypropylene float valve allows for a variable water level.

P110-100 SPECIFICATIONS:

P110-100 Stainless Steel Humidifier	TEMPERATURE		LB/HOUR	KG/HOUR	IMP. GAL. PER DAY	LITER PER DAY	U.S. GAL. PER DAY
	F°	C°					
DAILY OUTPUT CAPACITY 72° F (22° C) AND RELATIVE HUMIDITY OF 32%	170	77	8.65	3.93	2.00	90.9	24.0
	160	71	7.95	3.61	18.4	83.6	22.1
	150	65	7.25	3.29	16.8	76.4	20.2
	140	60	6.70	3.04	15.2	69.1	18.3
	130	54	5.89	2.67	13.6	61.8	16.4
	120	49	5.54	2.52	12.8	58.2	15.4
	110	43	4.75	2.16	11.4	51.8	13.7
	100	38	4.15	1.88	10.0	45.2	12.0
140° F (60° C) and 0.2 S.P. 0.25 kPa suggested ARI Standard Rating Conditions							
DIMENSIONS	H	10"		255 mm			
	W	11"		280 mm			
	L	11"		280 mm			
PLENUM OPENING BYPASS TUBE DIA.	6-15/16" x 7-13/16" 6"			176 mm x 198 mm 152 mm			
SHIPPING WEIGHT	13-1/4 lb			6.02 kg			
ELECTRICAL STANDARD	24 V Transformer AC 24 V Humidistat						
MOTOR	Synchronous 24 V. 3 w						
WATER SUPPLY	1/4" (.635 cm) Plastic Tubing						
WATER DRAIN CONNECTION	3/8" (9.5 mm) I.D. Plastic Tube Fitting on Unit 3/8" Tubing (not furnished)						
REPLACEMENT PAD	P110-0006 10-5/8" x 7-1/4" dia Polyurethane Foam						


TOTALINE[®] HUMIDIFIERS

TOTALINE[®] SIGNATURE HUMIDIFIER


FAN-POWERED HUMIDIFIERS

Model P110-LFP1318 is our most powerful! This is ideal for use in large homes or those with heat pump systems. It is rated to deliver 18 gallons of moisture per day. Easy to install because no bypass connection is needed.

Compact model P110-SFP1016A is ideal for use in smaller, tighter constructed, or well insulated homes. It is rated to deliver up to 16 gallons of moisture per day. Also easy to install because no bypass duct is needed.

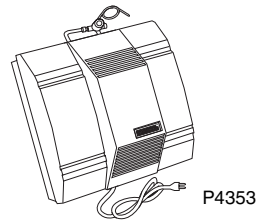

Part No. P110-LFP1318

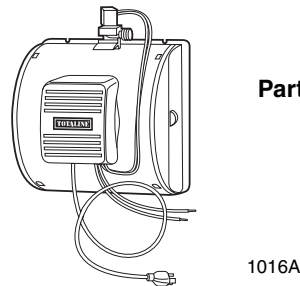

Part No. P110-SFP1016A


BYPASS HUMIDIFIERS

The bypass humidifiers are designed to operate based on pressure differential of the supply and return ductwork.

Deluxe model P110-LBP2317 is easy to install and is simple to maintain due to front or bottom access panels, yet no motor is needed. This provides up to 17 gallons of moisture per day for your home.

Compact model P110-SBP2312 is so small it fits where others cannot. It also outperforms some competitor's bigger units and offers improved comfort and savings. It is easy to maintain through a snap-button access panel. This provides up to 12 gallons of moisture per day for your home.


Both bypass models have a built-in damper. This means one less component for you to stock. It also reduces installation time and cost as the dealer does not have to install it in the bypass ductwork.

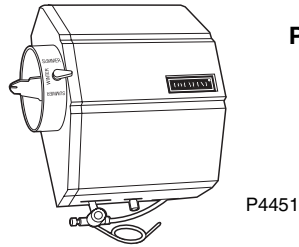

Part No. P110-LBP2317


FEATURES:

- All come with an adjustable humidistat
 - P110-0002, P110-SFP1016A
 - 4363 w/P110-SBP2312, P110-LFP1318, P110-LBP2317.
- Five-year limited warranty.

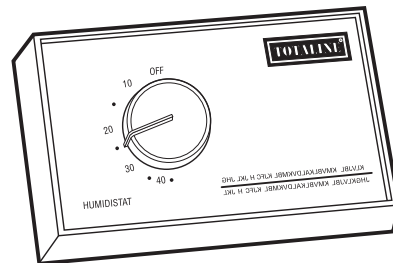

Part No. 4363

P4358



P4451


Part No. P110-SBP2312

PHYSICAL DATA

MODEL	P110-SBP2312	P110-LBP2317	P110-LFP1318	P110-SFP1016A
Replacement Media	P110-1045	P110-3545	P110-3545	324897-761
Size (in.) (HxWxD)	9-7/8 x 9-5/8 x 1-11/16	13 x 10 x 1-11/16		9-3/4 x 9-1/4 x 1-1/4


TOTALINE® HUMIDIFIERS AND ACCESSORIES

TOTALINE® SIGNATURE HUMIDIFIER

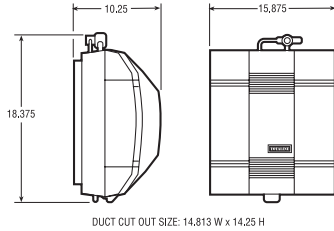


P4353A

P110-LFP1318

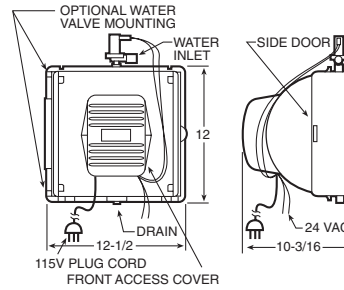


1016A2

P110-SFP1016A



P4451A

P110-LBP2317




P4561B

P110-SBP2312

HUMIDIFIER ACCESSORIES

TOTALINE® HUMIDISTAT




P110002

- UNIVERSALLY COMPATIBLE
- WALL OR DUCT MOUNTED
- DUST PROOF SWITCH
- 24 VOLT CONTROL VOLTAGE
- ADJUSTABLE FROM 0-60% RH

Part No.: P110-0002

OUTDOOR TEMPERATURE	-20° F (-29° C)	-10° F (-23° C)	0° F (-18° C)	+10° F (-12° C)	+20° F (-7° C)	OVER +20° F (-7° C)
RECOMMENDED SETTING	15%	20%	25%	30%	35%	40%

TOTALINE® WATER LINE TAP VALVE



P717

- SELF PIERCING SADDLE VALVE FOR WATER CONNECTION
- FOR 3/8" – 1-1/4" O.D. TUBING
- 1/4" COMPRESSION FITTING

Part No.: P110-0001