




ULTRA SUPER QUIET EXHAUST FAN

The CF-170ES fan is designed for high performance and quiet operation. This fan is equipped with specially designed mounting slots that allow for easy installation on concrete ceilings or wooden joists. The CF-170ES is constructed with corrosion resistant, heavy gauge satin coat steel. This fan is suitable for installation over bath tub or shower stall with GFCI protected branch circuit. The fan is certified by California Energy Commission in accordance with California Law - Title 20. It also meets Washington State Ventilation and Indoor Air Quality Code.

CF-170ES FAN DATA

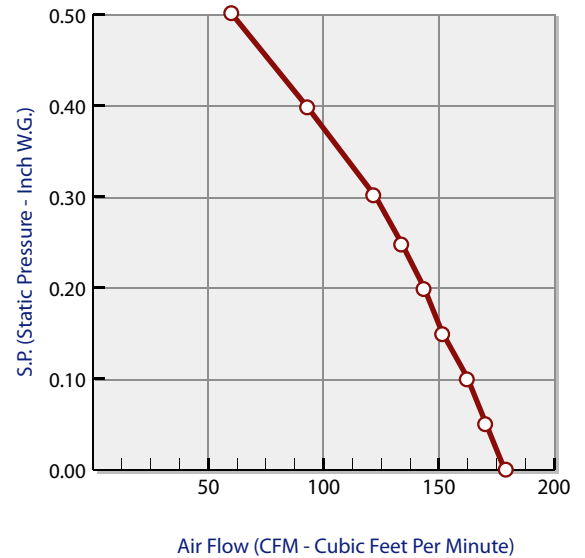

Plastic Backdraft Damper

White High Impact Styrene Grille

Off White Aluminum Grille

ACCESSORIES

Standard:

- Insulated housing
- Plastic backdraft damper or metal collar with neoprene damper
- Mounting brackets
- Aluminum or styrene grille

Optional:


- Variable speed control
- Aluminum backdraft damper



Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@www.reversomatic.com

CF-170ES (CF-170BC)

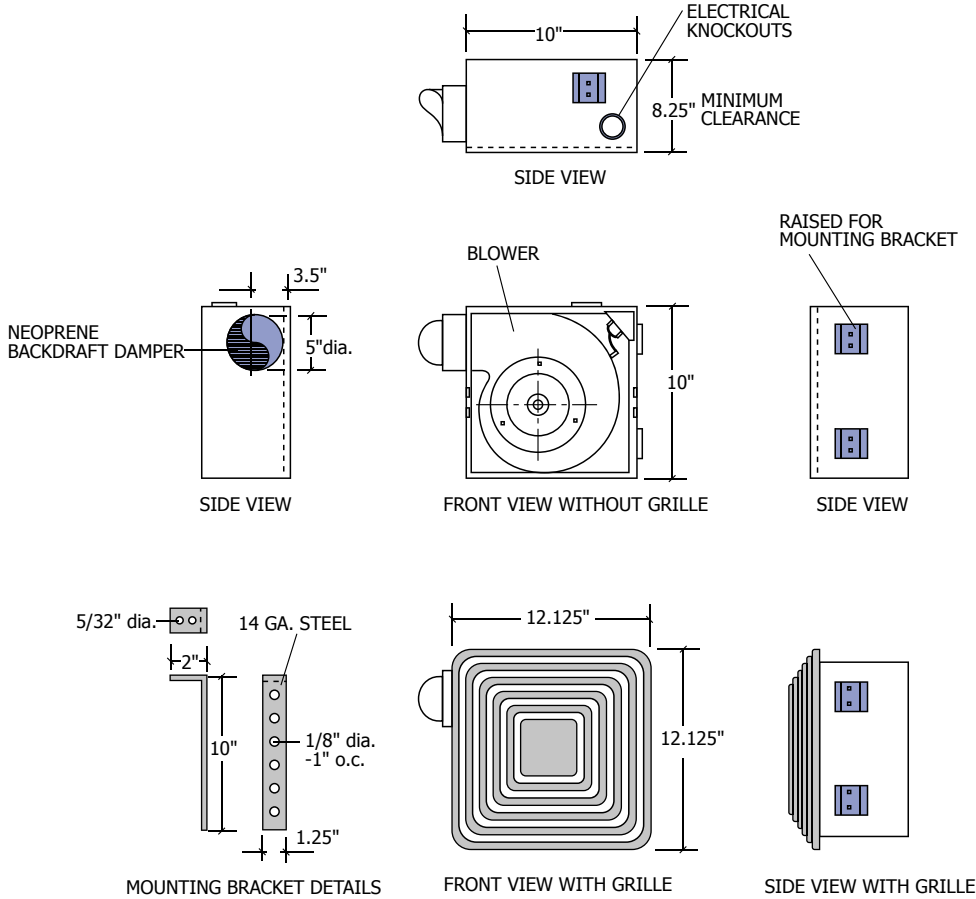

HVI CERTIFIED RATINGS

MODEL	SONES	CFM @ 0.10" S.P.
CF-170ES	1.5	160

FAN DATA

MODEL	MOTOR 120 VAC 60 Hz			CUBIC FEET PER MINUTE									
	RPM	AMPS	WATTS	S.P.	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.40	0.50
CF-170ES	1400	0.4	43.9	CFM	179	171	163	152	144	134	123	93	61

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test. Unit was tested with inlet grille, backdraft damper and outlet duct.

Contractor:		CF-170ES (CF-170BC)		
Architect:	Job:	Date	Supersedes	Drawing NO.
Engineer:	Date Submitted:			

Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
 www.reversomatic.com • info@reversomatic.com