REVERSOMATIC
MANUFACTURING LIMITED

QCF-150 *(CFS-150 US model)*

February, 2008

SUPER QUIET EXHAUST FAN

The QCF-150 fan is designed for high performance and quiet operation. This fan is equipped with uniquely designed mounting slots that allow for easy installation on concrete ceilings or wooden joists. The QCF-150 is constructed with corrosion resistant, heavy gauge satin coat steel. The fan is suitable for installation over bath tub or shower stall with GFCI protected branch circuit. It also meets Washington State Ventilation and Indoor Air Quality Code.

Plastic Backdraft Damper

Slotted White Grille

Off White Louvered Grille (optional)

QCF-150 FAN DATA

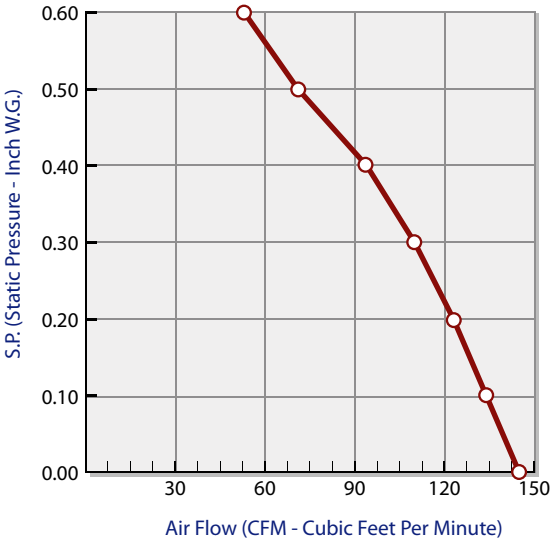

ACCESSORIES

Standard:

- Insulated housing
- Slotted white grille
- Plastic backdraft damper or metal collar with neoprene damper
- Mounting brackets

Optional:

- Variable speed control
- Aluminum backdraft damper
- Off white louvered grille

C US

2100 HVI CERTIFIED

Reversomatic Manufacturing Ltd.
790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@www.reversomatic.com

QCF-150 *(CFS-150 US model)*

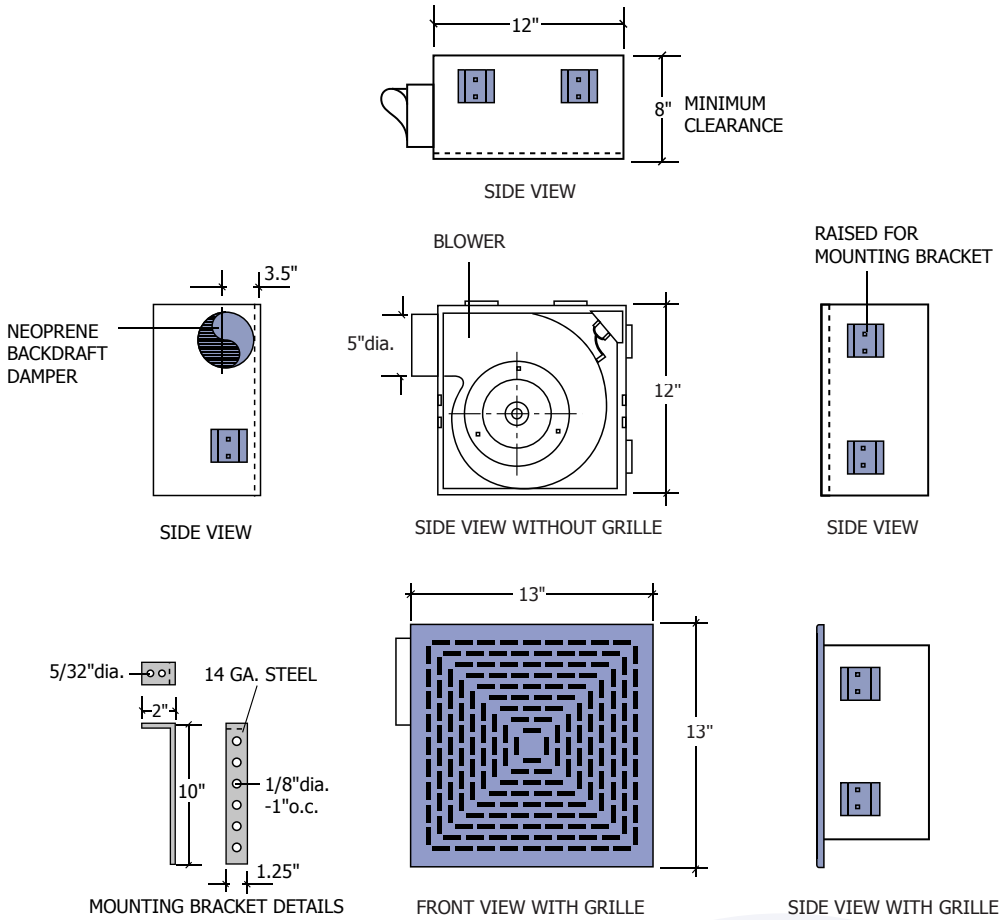

HVI CERTIFIED RATINGS

MODEL	SONES	CFM @ 0.10" S.P.
QCF-150	2.5	130

FAN DATA

MODEL	MOTOR 120 VAC 60 Hz		CUBIC FEET PER MINUTE							
	RPM	AMPS	S.P.	0.00	0.10	0.20	0.30	0.40	0.50	0.60
QCF-150	1100	1.0	CFM	145	134	123	110	94	71	53

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test.
Unit was tested with inlet grille, backdraft damper and outlet duct.

Contractor:		QCF-150		
Architect:	Job:	Date	Supersedes	Drawing NO.
Engineer:	Date Submitted:			

Reversomatic Manufacturing Ltd.
790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@reversomatic.com