



BATHROOM EXHAUST FAN

The RS-90 and RS-100 fans have been specially designed for bathrooms in residential units that require exceptionally low noise levels. These fans are manufactured with a squirrel cage impeller for high performance. The slim housing design allows for easy installation in those tight ceiling and wall spaces. The fans meet Washington State Ventilation and Indoor Air Quality Code.




Plastic Backdraft Damper

High Impact Styrene Grille

Off White Aluminum Louvered Grille (optional)

RS-90, RS-100 FAN DATA

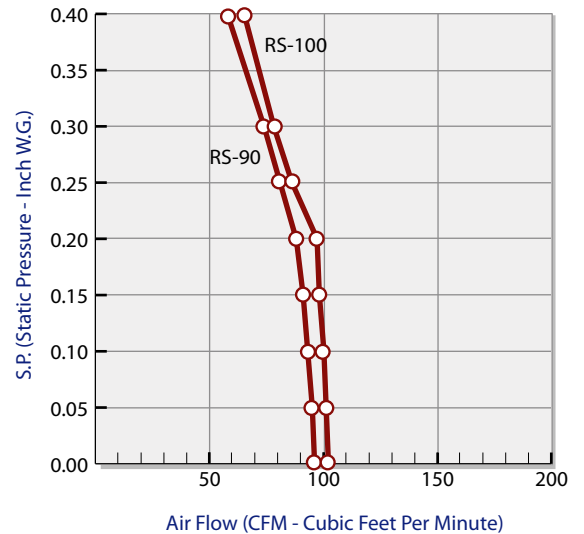

ACCESSORIES

Standard:

- Plastic snap-in grille
- Plastic backdraft damper or metal collar with neoprene damper
- Mounting bracket


Optional:

- Variable speed control
- Aluminum backdraft damper
- Off white aluminum grille



Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@www.reversomatic.com

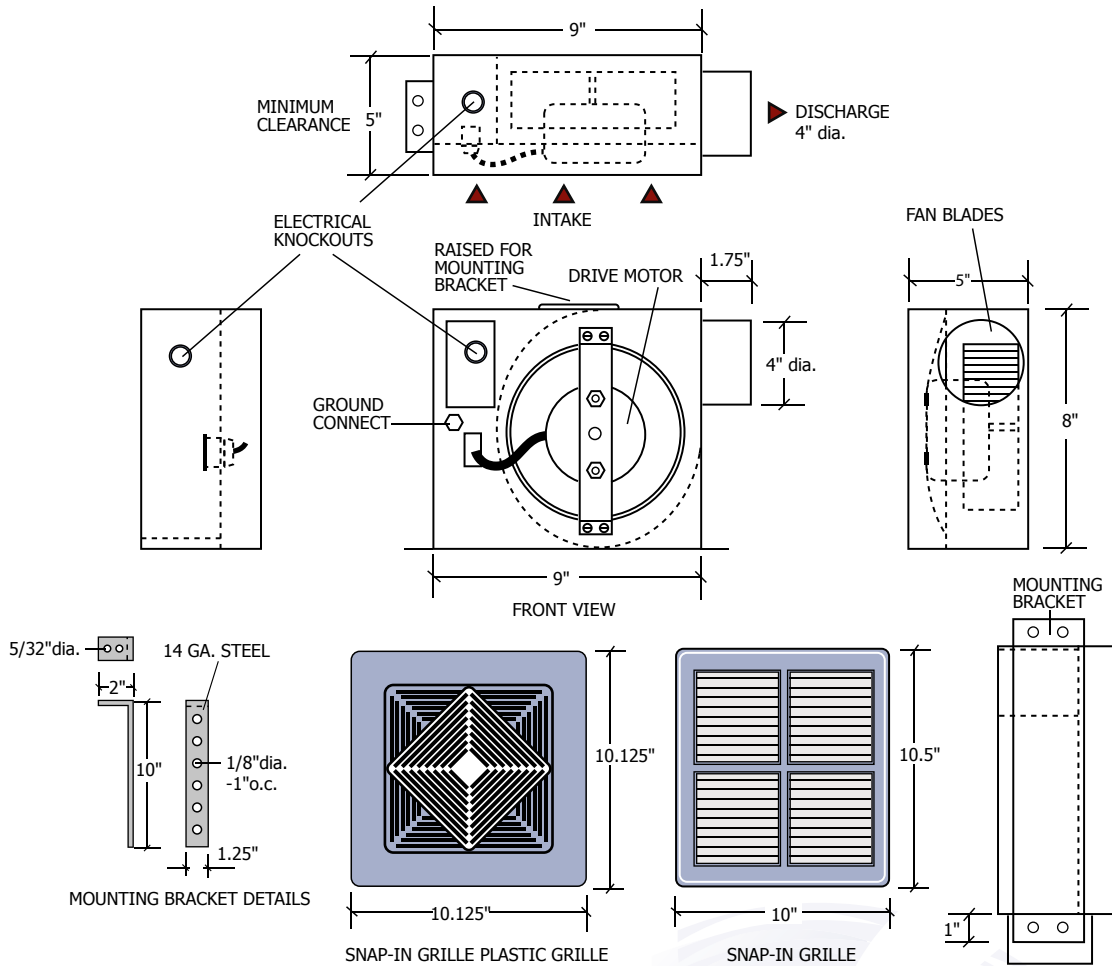

HVI CERTIFIED RATINGS

MODEL	SONES	CFM @ 0.10" S.P.
RS-90	2.5	90
RS-100	2.5	100

FAN DATA

MODEL	MOTOR 120 VAC 60 Hz		CUBIC FEET PER MINUTE								
	RPM	AMPS	S.P.	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.40
RS-90	1500	0.50	CFM	96	95	93	91	88	81	74	58
RS-100	1500	0.70	CFM	102	101	100	98	97	86	78	65

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test. Unit was tested with inlet grille, backdraft damper and outlet duct.

Contractor:	RS-90, RS-100		
Architect:	Job:	Date	Supersedes
Engineer:	Date Submitted:		Drawing NO.

Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
 www.reversomatic.com • info@reversomatic.com